

Piranha

Submersible Solids Handling Pumps—Stainless Steel Model PSS-750


3 & 4 Inch Discharge

7.5 hp, 230/460v 3 phase

Home Of Piranha Pumps www.piranhapump.com

Pump Construction

- Housing 316 Stainless Steel
- Mechanical Seals Silicon Carbide
- Impeller 316 Stainless Steel
Vortex Type
- Rotor Shaft 416 Stainless Steel
- Volute 316 Stainless Steel
- Solids Size 2 Inch
- Strainer None
- Hardware 316 SS
- Pump Weight 141 lbs
- Lifting Handle 316 SS With Rubber Grip
- Height: 26.6"
- Width: min. 9.9", max. 20.7"
- Min. water level: 15"

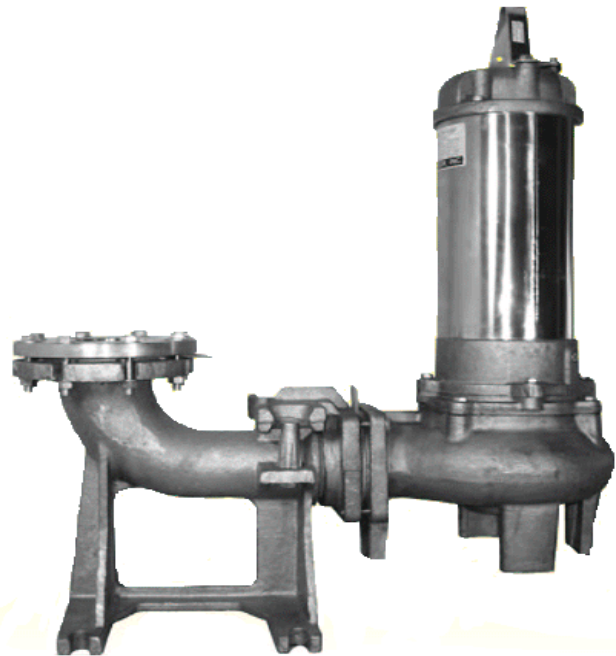

Motor Specifications

- Rating 7.5 hp
- Voltage 230/460 V 3 phase
- Current F.L.A. 10.5
- Thermal Overload Integral
- RPM 3450
- Power Cable 50'

Piranha pump model PSS-750
7.5 hp, 230v/460v, 3 phase

